
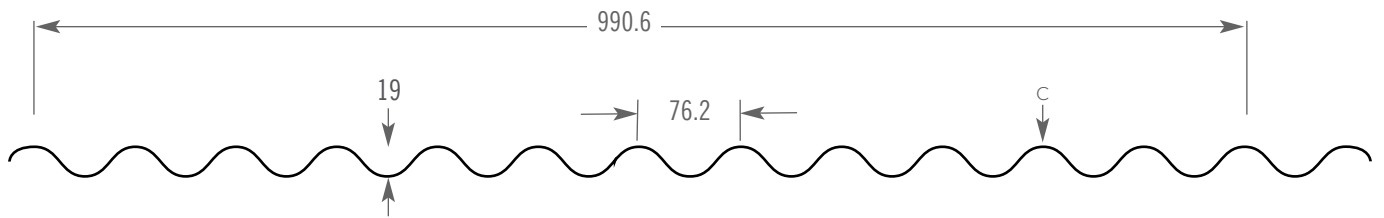


TPP CORRUGATED 14/3

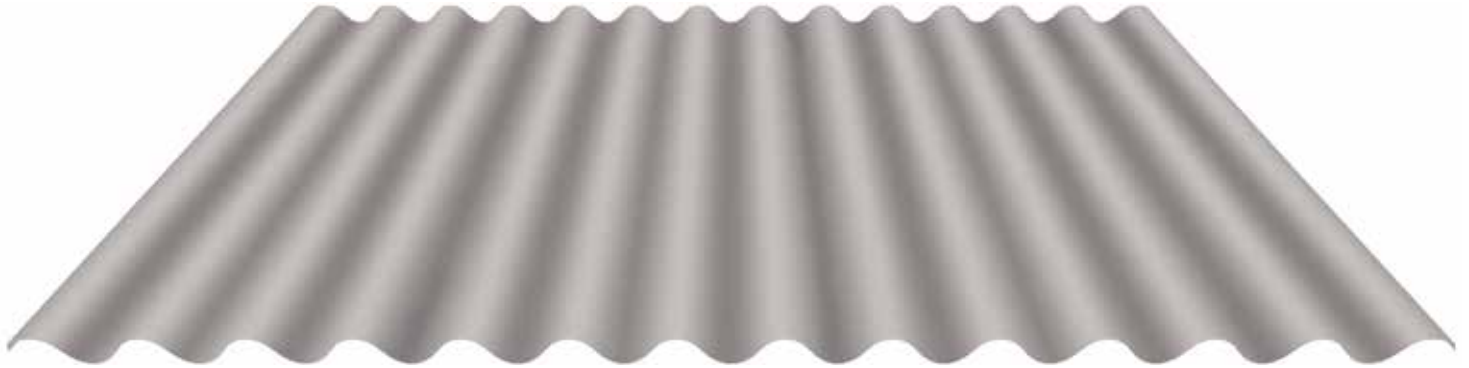

Permissible downward (imposed) loads in kN/m²

Sheet Thickness	Weight kg/m ²	Span Condition	Span (mm)						
			600	800	1000	1200	1400	1600	1800
0.50mm	4.78	single	9.32	4.51	2.19	1.22	0.99	0.75	-
		double	5.93	3.66	2.49	1.81	1.09	1.25	-
		multi	7.33	4.54	3.09	2.04	1.34	1.25	-
0.70mm	6.22	single	12.3	5.91	2.87	1.6	0.99	-	-
		double	8.36	5.1	3.44	2.48	1.64	1.08	0.75
		multi	10.4	6.36	4.29	2.67	1.64	1.08	0.75

Permissible downward (imposed) loads in kN/m²

Sheet Thickness	Weight kg/m ²	Span Condition	Span (mm)						
			600	800	1000	1200	1400	1600	1800
0.50mm	4.78	single	9.32	4.94	2.92	1.63	1	-	-
		double	5.93	3.66	2.49	1.81	1.37	1.08	0.76
		multi	7.33	4.54	3.09	2.24	1.67	1.1	0.76
0.70mm	6.22	single	2.3	6.52	3.83	2.14	1.32	0.87	-
		double	8.36	5.1	3.44	2.48	1.87	1.44	1
		multi	10.4	6.36	4.29	3.1	2.19	1.44	1

C= Coloured face

All products are subject to manufacturing tolerances +/-

